

Data Sheet

IBR200 Series Router

2023 - 10 - 09

Cradlepoint's NetCloud Service for IoT with the IBR200 Series Router is a purpose-built, IoT networking solution with industry-leading features. With its compact size, external cellular and Wi-Fi antennas, and the capability to operate in a wide temperature range, the Cradlepoint IBR200 Series Router is ideal for use in IoT applications including plant and machinery controls, surveillance cameras, digital signs, kiosks, and ATMs.

Ideal for Cellular IoT Connectivity

The IBR200 provides connectivity options including Cat 1 LTE modem, Ethernet, Wi-Fi, GPIO ports, and passive GPS. It provides a semi-ruggedized enterprise class networking platform that can be confidently deployed in diverse implementations such as smart cities, manufacturing, and other IoT scenarios requiring robust connectivity. The IBR200 accommodates a wide range of environments while delivering enterprise-class standards of reliability, scalability, comprehensive management, and security.

Robust Cloud Managed IoT Solution

For organizations requiring robust connectivity for IoT networks — with installed routers numbering from hundreds to many thousands — Cradlepoint's NetCloud Service for IoT with the IBR200 router provides a comprehensive cloud managed network solution. When coupled with advanced IoT features, it provides troubleshooting and diagnostics with inband and out-of-band management, extensive analytics and insights, and extensibility and integrations such as Microsoft Azure IoT Central. Cradlepoint's NetCloud-managed IoT endpoints can be rapidly deployed and easily scaled to accommodate the diverse requirements of organizations.







Notable Benefits

- Deploy a competitively priced valuedriven IoT networking solution with industry-leading features
- Define policies through centralized cloud-based management for easy deployment at scale
- Connect with an LTE Category 1 modem that provides performance and affordability for moderate data rate applications
- Support Wi-Fi for easy deployment and connectivity of things
- Expand with custom solutions using GPIOs, NetCloud SDK and API, and NetCloud Edge Connector for Microsoft Azure IoT Central
- Secure with zone-based firewall and advanced security for PCI-compliant networking
- Provide a semi-ruggedized solution with wide temperature range for broad deployment options


Key Software Capabilities



NetCloud Service provides powerful centralized management for every Cradlepoint cellular-enabled router, including the IBR200. NetCloud allows customers to build and manage wireless WANs with complete lifecycle management, zero-touch deployment, robust security, and traffic management for optimal application performance and reliability. The cloud capabilities include group policy definition, reports, troubleshooting, and visual analytics dashboards. With a continuous subscription to NetCloud, Cradlepoint routers maintain their limited lifetime warranty, access to online training, live and online support, and software and firmware updates.


Advanced Software Lifecycle Management

NetCloud improves the typical software lifecycle management process. New features are continuously delivered to the NetCloud Service and available for the router without interrupting network performance. Software versions are tracked for every endpoint, with the latest version just a click away. Straightforward subscription and license management is provided to keep the network running without interruption.

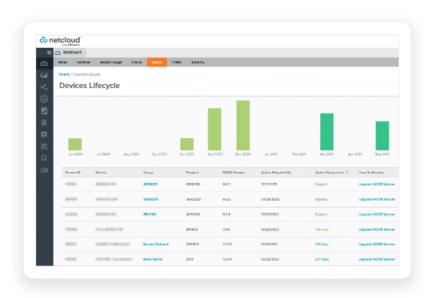

Cradlepoint Verify™ Mobile Application


Cradlepoint Verify is a mobile application that simplifies and customizes steps to install the Cradlepoint IBR200 router. Upon a verified installation, users receive a detailed report that includes installation pictures, speed test results, and modem health metrics.



Connection Manager



Connection Manager provides the ability to manage all WAN connection types including wireless, Wi-Fi-as-WAN, and wired, from a single software-defined policy. Our proprietary modern software ensures users establish Wireless WAN connectivity faster while maintaining the highest level of resiliency.

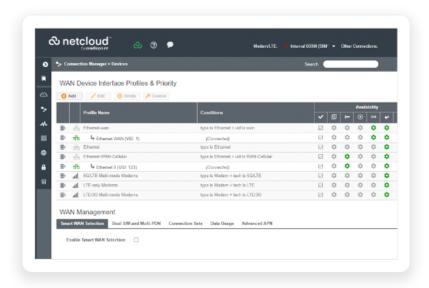

Cloud Services

NetCloud Manager delivers zero-touch deployment with the ability to define and deliver policy across entire groups of endpoints. Users can gain insights and analytics required for rapid troubleshooting and diagnostic workflows. Location services provides last known map location and geofence alerting for loss prevention and physical security.



Hardware Specifications

The following features are delivered through the hardware.

INTERFACES



Modem:	Embedded 10M modem
	— 2 x SMA Cellular Antenna Connectors
Ethernet:	— 1 x FE RJ45
	Wi-Fi Alliance Certified
Expansion/ Console:	Power with 2 x GPIO (one input, one output)
	— 1 x USB 2.0 Type A (output: 5 V, 500 mA, 2.5 W)
Wi-Fi:	Single radio, single band (2.4 GHz)
	— 1x1 802.11b/g/n Wi-Fi 4
	- 72 Mbps (2.4 GHz)
	External 1x1 antenna
	— Two (2) Wi-Fi SSIDs
	WPA/WPA2 Persona, WPA2 Enterprise, Open
GNSS/GPS:	North America: Passive GNSS
	Europe, Asia-Pacific: N/A
ENVIRONMENTAL	
Temperature:	Operating: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity:	— Operating: 5% to 95%
	— Storage: 5% to 95%
Ingress Protection:	N/A
POWER	
Power Required:	One of the following:
	 12 VDC conditioned steady state input (no voltage tolerance)
	 External DC power supply, 100-240 VAC input. 12 VDC 1A output (included)
Consumption:	 Idle: 2.7 W (1.8 W with Wi-Fi off)
	Typical: 3.6 W (2.8 W with Wi-Fi off)
	— Heavy usage: 5.8 W
PHYSICAL	
Size:	76.5 × 94.5 × 24.5 mm (3.0 × 3.7 × 1.0 in)
Weight:	175 g (6 oz)
RELIABILITY	
Calculated MTBF:	 IBR200-10M: 827, 015 hours (Telcordia SR332 at 25 °C) IBR200-10M-B: 821,192 hours (Telcordia SR332 at 25 °C)
	— IBR200-10M-C: 1,077,280 hours (Telcordia SR332 at 25 °C)



CERTIFICATIONS	
Safety:	UL/cUL, CB Scheme, EN 60950-1, EN 62368-1
Materials:	WEEE, RoHS, RoHS-2, California Prop 65
CLOUD SERVICES	
Service Plans:	NetCloud Service for IoT Gateway
Service Add-Ons:	NetCloud Exchange, NetCloud Advanced
Support:	NetCloud Packages include support for the full subscription term.
Warranty:	All Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active NetCloud Service Plan.
Device Management:	NetCloud Manager for the full subscription term.
Software Updates:	NetCloud Manager for the full subscription term.
WI-FI POWER	
FCC:	2402-2483.5 MHz (2.4 GHz band): 25.3 dBm conducted
Rest of World:	2402-2483.5 MHz (2.4 GHz band): 14.99 dBm conducted
PERFORMANCE	
Stateful Firewall	60 Mbps
Throughput:	
IPsec VPN Throughput:	10 Mbps
Concurrent VPN	2
Tunnels:	
Concurrent Sessions	16,000
(TCP):	
Typical Client Count:	5
LEDS	
	Refer to the IBR200 Quick Start Guide.

Performance testing conducted based on requirements as defined in RFC2544 using fixed-frame 1518 byte packets. Throughput results reflect uni-directional UDP traffic with less than 1% packet loss as tested with wired connections.

Results do not reflect performance of the cellular wireless operator networks.

Enterprise-Class Modem Specifications

SPECIFICATION	10M (VERIZON)	10M-B (AT&T, T-MOBILE)	10M-C (SPRINT)
Technology:	Cat 1 LTE (3GPP Rel.10)	Cat 1 LTE (3GPP Rel.10)	Cat 1 LTE (3GPP Rel.10)
	 Single SIM slot, 2FF form factor 	 Single SIM slot, 2FF form factor 	 Single SIM slot, 2FF form factor
3G:	N/A	WCDMA/UMTS/HSPA+	N/A
Carrier	N/A	N/A	N/A
Aggregation:			
Peak Downlink	10 Mbps	10 Mbps	10 Mbps
Rates (LTE):			



5 Mbps	5 Mbps	5 Mbps
N/A	N/A	N/A
Up to 16	Up to 16	Up to 16
LTE FDD:	LTE FDD:	LTE FDD:
— B4, B13	— B2, B4, B5, B12	— B2, B4, B5, B12, B25, B26
N/A	B2, B4, B5	N/A
LTE only: 23 dBm ± 1 (typical conducted)	 LTE only: 23 dBm ± 1 (typical conducted) HSPA+: 23 dBm ± 1 (typical conducted) 	LTE only; 23 dBm ± 1 (typical conducted)
SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)
Passive GNSS - Multiplex on AUX antenna port	Passive GNSS - Multiplex on AUX antenna port	N/A
Yes	Yes	Yes
FCC (U.S.), UL (U.S.)	FCC (U.S.), UL (U.S.), IC (Canada)	FCC (U.S.), UL (U.S.)
PTCRB (U.S., Canada)	PTCRB (U.S., Canada)	PTCRB (U.S., Canada)
Verizon [†]	AT&T†	Sprint [†]
	N/A Up to 16 LTE FDD: — B4, B13 N/A LTE only: 23 dBm ± 1 (typical conducted) SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included) Passive GNSS — Multiplex on AUX antenna port Yes FCC (U.S.), UL (U.S.) PTCRB (U.S., Canada)	N/A N/A Up to 16 Up to 16 LTE FDD: LTE FDD: — B4, B13 — B2, B4, B5, B12 N/A B2, B4, B5 LTE only: 23 dBm ± 1 (typical conducted) — LTE only: 23 dBm ± 1 (typical conducted) — HSPA+: 23 dBm ± 1 (typical conducted) — MITE - 6 GHz cellular paddle antennas (Qty 2, included) Passive GNSS Passive GNSS — Multiplex on AUX antenna port — Multiplex on AUX antenna port Yes Yes FCC (U.S.), UL (U.S.) FCC (U.S.), UL (U.S.), IC (Canada) PTCRB (U.S., Canada) PTCRB (U.S., Canada)


†Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications, to operate on their network. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

SPECIFICATION	10M-D (EUROPE)	10M-E (ASIA-PACIFIC)
Technology:	Cat 1 LTE (3GPP Rel.10)	Cat 1 LTE (3GPP Rel.10)
	Single SIM slot, 2FF form factor	 Single SIM slot, 2FF form factor
3G:	WCDMA/UMTS/HSPA+	WCDMA/UMTS/HSPA+
Carrier Aggregation:	N/A	N/A
Peak Downlink Rates	10 Mbps	10 Mbps
(LTE):		
Peak Uplink Rates	5 Mbps	5 Mbps
(LTE):		
MIMO:	N/A	N/A
QAM:	Up to 16	Up to 16


4G/LTE Bands:	LTE FDD:	LTE FDD:
	— B1, B3, B5, B7, B8, B20	— B1, B3, B5, B7, B28
3G Bands:	B1, B5, B8	B1, B5
GSM Bands:	B3, B8	N/A
	 LTE: 23 dBm ± 1 (typical conducted) HSPA+: 23 dBm ± 1 (typical conducted) GSM 850 MHz: 33dBm±2dB (typical conducted) GSM 1800 MHz: 30dBm±2dB (typical conducted) 	 LTE: 23 dBm ± 1 (typical conducted) HSPA+: 23 dBm ± 1 (typical conducted)
	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)
GNSS/GPS:	N/A	N/A
SMS:	Yes	Yes
Regulatory:	CE (EU)	RCM (AU/NZ)
Network Operator	GCF (Worldwide)	GCF (Worldwide)
Standards:		
Network Operator	See note [†]	See note†
Certifications:		

[†] Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications, to operate on their network. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

Physical Measurements & Features

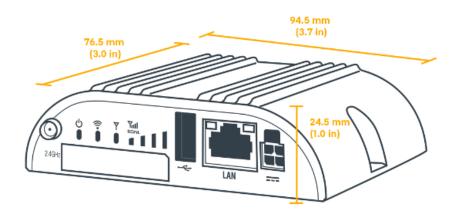

Features

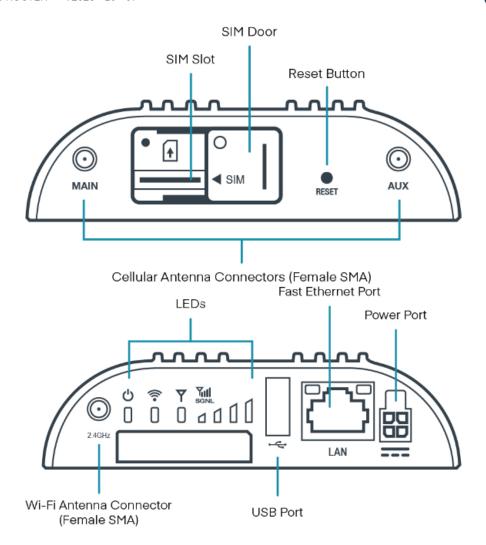

SIM Card Info



Ordering Guide

NetCloud IoT Gateway Essentials packages and plans contain all the features and capabilities required for a broad range of mobile or invehicle applications. Essentials Packages include 24x7 support (phone support: 24 hour weekdays with emergency response on weekends, web: 24x7, chat: 24x5) and a limited lifetime warranty.

For additional capabilities, a NetCloud IoT Advanced Plan can be added to the NetCloud IoT Gateway Essentials package at any time.



See additional details of what is included in the Essential and Advanced NetCloud software: https://cradlepoint.com/netcloud-service

NetCloud Packages for the IBR200 Series Router

REGION	MODEM	PACKAGE PLAN	PART NUMBER
North America:	— 10M for Verizon	IoT Gateway Essentials	TBy-020010M-VNN
U.S., Canada, Mexico	10M for AT&T and generic10M for Sprint		TBy-020010M-ANN
			TBy-020010M-SNN
United States:	 10 Mbps with Wi-Fi for Verizon 	TAA Compliant NC IoT Gateway	TAA-TBy-020010M-
Federal Government	 10 Mbps with Wi-Fi for AT&T and generic 	Essentials	VNN
			TAA-TBy-020010M-
			ANN
Europe & South Africa:	10M	IoT Gateway Essentials	TBy-020010M-EWM
Asia-Pacific:	10M	IoT Gateway Essentials	TBy-020010M-PWM
Australia, New			
Zealand,			
Singapore, and			
Malasia			
All Regions:		Advanced	TBy-NCADV
•		Essentials Renewal	TBy-NCESS-R
		 Advanced Renewal 	TBy-NCADV-R

y = 3 or 5 years

Accessories

INCLUDED	PART NUMBER
One of the following power supplies:	
Power Supply, 12V Small 2x2 1.5M (North America Type A)	170716-000
 Power Supply, 12V Small 2x2 1.5M (North America-United Kingdom-Europe-Australia Types A-G-C-I) 	170717-000
Cellular Antenna, Charcoal, 600 MHz – 6 GHz, SMA (Qty 2)	170801-000
Wi-Fi Antenna, Charcoal, Dual-Band 2.4/5 GHz, RPSMA (Qty 1)	170836-000
OPTIONAL	PART NUMBER
GPIO Cable, Small 2x2 Black 3M 22AWG	170585-001
DIN Rail Mounting Bracket	170656-002
Small 2x2 Power to Barrel Adapter, 152 mm	170665-000
Magnetic Mount Kit	170718-000
Rail Safe GPIO Cable, Small 2x2, Black, 3 meters, 20 AWG	170871-000



UNITED STATES FEDERAL GOVERNMENT	PART NUMBER
GPIO Cable, Small 2x2, Black, 3 meters, 22 AWG	TAA-170585-001
DIN Rail Mounting Bracke	TAA-170656-002
Small 2x2 Power to Barrel Adapter, 152 mm	TAA-170665-000
Power Supply, 12 V, Small 2x2, 1.5 meters (North America Type A)	TAA-170716-000
Power Supply, 12 V, Small 2x2, 1.5 meters (North America-United Kingdom-Europe-Australia Types A-G-C-I)	TAA-170717-000
Magnetic Mount Kit	TAA-170718-000
Cellular Antenna, Charcoal, 600 MHz - 6 GHz, SMA, 180 mm	TAA-170801-000

Support & Warranty

The IBR200 router is only sold as a component of NetCloud IoT Gateway Essentials Packages.

- NetCloud Packages include support for the full subscription term.
- All Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active NetCloud Service Plan.

More information

Find the most up-to-date information at cradlepoint.com/ibr200