

#### **Data Sheet**

# MC400 Modular Modem

2023 - 03 - 24

MC400 Modular Modems allow MC400-capable branch, mobile, and IoT routers to be easily field upgraded with the most recent industry-leading cellular capabilities. The MC400 Modular Modems combine enterprise reliability with industry leading performance. Available modems include both LTE Advanced and 5G for fast robust connections.







#### Notable Features

- Better return on investment with the capability to upgrade to the latest modems without replacing the original hardware.
- Higher availability by installing a second modem for failover connectivity.
- Lower data plan costs by automatically switching to the second modem/SIM when the data plan cap on the primary modem/SIM has been reached.
- Certified versions are available for public safety networks worldwide.

# **Hardware Specifications**

The following features are delivered through the hardware.

ENVIRONMENTAL	MC400-1200M-B	MC400-5GB
Temperature:	<ul> <li>Operating: -30 °C to 70 °C (-22 °F to 158 °F)</li> <li>Storage: -40 °C to 85 °C (-40 °F to 185 °F)</li> </ul>	<ul> <li>Operating: -30 °C to 70 °C (-22 °F to 158 °F)</li> <li>Storage: -40 °C to 85 °C (-40 °F to 185 °F)</li> </ul>
Humidity:	<ul><li>Operating: 5% to 95%</li><li>Storage: 5% to 95%</li></ul>	<ul><li>Operating: 5% to 95%</li><li>Storage: 5% to 95%</li></ul>
POWER		
Required:	Provided through USB by the host	Provided through USB by the host
PHYSICAL		



Size:	93 x 74 x 13 mm (3.7 x 2.9 x 0.5 in)	93 x 74 x 13 mm (3.7 x 2.9 x 0.5 in)
Weight:	.104 kg (3.7 oz)	.104 kg (3.7 oz)
CERTIFICATIONS		
Safety:	UL/cUL, CB Scheme, EN 60950-1, EN 62368-1	UL/cUL, CB Scheme, EN 62368-1
Shock/Vibration/Humidity:	Compliant with MIL STD 810G and SAEJ1455 when	Compliant with MIL STD 810G and
	inserted in an IBR1700 router, a COR Extensibility Dock	SAEJ1455 when inserted in an IBR1700
	attached to an IBR900 Series router, or a R1900 router with	router or R1900 router with a RX30-MC
	a RX30-MC Managed Accessory.	Managed Accessory.
Materials:	WEEE, RoHS, REACH, California Prop 65	WEEE, RoHS, REACH, California Prop 65
COMPATIBILITY		
Supported Endpoints:	— AER1600	— AER2200
	— AER2200	- IBR1700
	- CBA850	— E300
	- IBR1700	— E3000
	─ IBR900 <sup>†</sup>	- R1900 <sup>††</sup>
	- IBR600C <sup>†</sup>	— R920 <sup>†††</sup>
	— E300	
	— E3000	
	— R1900 <sup>††</sup>	
	— R500 <sup>†</sup>	

<sup>†</sup>Requires a COR Extensibility Dock.

# **Enterprise-Class Modem Specifications**

SPECIFICATION	MC400-1200M-B	MC400-5GB
Technology:	Cat 18 LTE Advanced Pro (3GPP Rel. 12)	5G NR (Low/Mid-Band FR1) and 4G LTE Category 20 LTE
	Dual SIM slots, 2FF form factor	Advanced Pro with Dual Connectivity
	<ul> <li>SIM-based auto-carrier selection</li> </ul>	<ul> <li>Dual SIM slots, 4FF form factor</li> </ul>
		<ul> <li>SIM-based auto-carrier selection</li> </ul>
3G:	WCDMA/DC-HSPA+	WCDMA/DC-HSPA+
Carrier Aggregation:	Up to 5CA downlink, 2CA uplink	LTE only; up to 7CA downlink, 2CA uplink ENDC 5G + LTE;
	Refer to the Modem Carrier Aggregations	downlink and uplink supported
	article.	Refer to the Modem Carrier Aggregations article.
Peak Downlink Rates:	— LTE: 1.2 Gbps	Up to 4.14 Gbps — based on 20 Layers LTE + TDD (100 MHz
	<ul><li>DC-HPSA+: 42.2 Mbps</li></ul>	BW, 256 QAM, 4X4)
Peak Uplink Rates:	LTE: 150 Mbps	Up to 660 Mbps — based on 2 Layers LTE + TDD (100 MHz
	<ul><li>DC-HPSA+: 5.76 Mbps</li></ul>	BW, 256 QAM, SISO)

<sup>&</sup>lt;sup>††</sup>Requires an RX30-MC Managed Accessory.

<sup>†††</sup>Requires an RX20-MC Managed Accessory.



MIMO:	4x4 MIMO	4x4 MIMO
Modulation:	Up to 256 QAM	Up to 256 — FR1 QAM
4G/LTE Bands:	LTE FDD	LTE FDD
	<ul> <li>B1, B2, B3, B4, B5, B7, B8, B12, B13, B14,</li> <li>B17, B18, B19, B20, B25, B26, B28, B29,</li> <li>B30, B32, B66, B71</li> </ul>	<ul> <li>B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20,</li> <li>B21, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40,</li> <li>B41, B42, B43, B46, B48, B66, B71</li> </ul>
	LTE TDD	
	<ul> <li>B38, B39, B40, B41, B42, B43, B46, B48</li> </ul>	
5G NR Bands:	N/A	n1, n2, n3, n5, n7, n8, n12, n20, n25, n28, n38, n40, n41, n48, n66, n71, n77, n78, n79
3G Bands:	B1, B2, B4, B5, B8, B9, B19	B1, B2, B3, B4, B5, B6, B8, B9, B19
Power:	LTE 23 dBm $\pm$ 1, DC-HSPA+ 23 dBm $\pm$ 1 (typical conducted)	<ul> <li>LTE only; 23 dBm ± 1 (typical conducted)</li> <li>ENDC 5G + LTE; 20 dBm ± 1 (typical conducted)</li> </ul>
Antennas:	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 4, included)	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 4, included only with supported Branch routers)
GNSS/GPS:	Active GPS	Passive GNSS (multiplex with DIV/MIMO2 antenna ports)
SMS:	Yes	Yes
Regulatory:	FCC (U.S.), IC (Canada), CE (EU), RCM (AU/NZ)	FCC (U.S.), IC (Canada), CE (EU), RCM (AU/NZ)
Network Operator Standards:	PTCRB (U.S., Canada), GCF (Worldwide)	PTCRB (U.S., Canada), GCF (Worldwide)
Network Operator Certifications:	AT&T, Verizon <sup>†</sup>	AT&T, T-Mobile, Verizon
Public Safety Network Certifications:	FirstNet Capable™, Verizon Frontline	FirstNet Capable™, T-Mobile Connecting Heroes, Verizon Frontline
Private Cellular Network:	Yes, includes FCC Part 96 (CBRS Band 48)	Yes, includes FCC Part 96 (CBRS Band 48)


<sup>&</sup>lt;sup>†</sup>Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

# **Physical Measurements & Features**






### Features — MC400-5GB

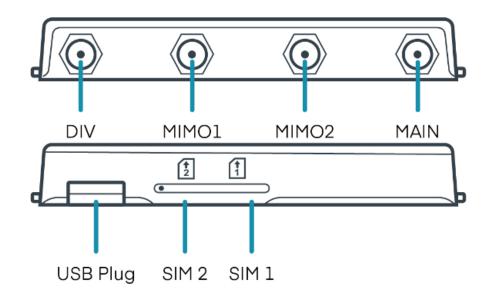

# Features — MC400-1200M-B

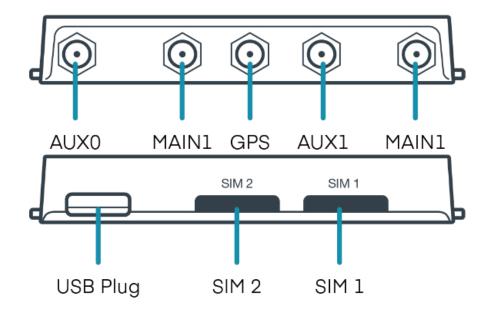

SIM Card Info - MC400-5GB



SIM Card Info - MC400-1200M-B



# **Ordering Guide**

The MC400 Modular Modem is an accessory for Cradlepoint routers and adapters that have an expansion slot to accept a modular modem. Activation and use of the MC400 Modular Modem requires a Cradlepoint endpoint that is licensed to a NetCloud Service Plan. For details on the features available to a licensed Cradlepoint router or adapter by service plan, refer to the summary on the NetCloud Service webpage and the detail in the NetCloud Service Features document.

NetCloud Packages for the MC400 Modular Modem

REGION	MODEM	PACKAGE PLANS	PART NUMBER
All Regions:	Cat 18 (1200 Mbps)	Upgrade for CBA850 LTE Branch	BB-MC400-
Asia-Pacific, Australia, Canada,		Adapter	1200M-B
European Union, New Zealand,	<ul> <li>Includes 4 Cellular Antennas,</li> </ul>		
United Kingdom, and United States	White, 700 MHz - 2.7 GHz, SMA,		
	160 mm		
	Cat 18 (1200 Mbps)	Upgrade for R1900 with RX30-	MA-MC400-
		MC, IBR1700, or COR	1200M-B
	<ul> <li>No antennas</li> </ul>	Extensibility Dock	
	Cat 18 (1200 Mbps)	Upgrade for E300/E3000	BF-MC400-
		Enterprise Branch Routers	1200M-B
	<ul> <li>Includes 4 Cellular Antennas,</li> </ul>		
	Charcoal, 600 MHz - 6 GHz, SMA,		
	180 mm (Part #: 170801-000)		
	5G	Upgrade for AER2200 Branch	BA-MC400-5GB
		Routers	
	<ul> <li>Includes 4 Cellular Antennas,</li> </ul>		
	Charcoal, 600 MHz - 6 GHz, SMA,		
	180 mm (Part #: 170801-000)		
	5G	Upgrade for R1900 with RX30-	MB-MC400-5GB
		MC or IBR1700 Mobile Routers	
	<ul> <li>No antennas</li> </ul>		
	5G	Upgrade for E300/E3000	BF-MC400-5GB
		Enterprise Branch Routers	
	<ul> <li>Includes 4 Cellular Antennas,</li> </ul>		
	01 1 (00 1411 / 011 0144		



180 mm (Part #: 170801-000)		
Cat 18 (1200 Mbps)	Upgrade for R1900 with RX30-	TAA-MA-MC400-
<ul><li>No antennas</li></ul>	MC, IBR1700, or COR Extensibility Dock	1200M-B
Cat 18 (1200 Mbps)	Upgrade for E300/E3000	TAA-BF-MC400-
<ul> <li>Includes 4 Cellular Antennas,</li> <li>Charcoal, 600 MHz - 6 GHz, SMA,</li> <li>180 mm (Part #: TAA-170801-000)</li> </ul>	Enterprise Branch Routers	1200M-B
	180 mm (Part #: 170801-000)  Cat 18 (1200 Mbps)  No antennas  Cat 18 (1200 Mbps)  Includes 4 Cellular Antennas, Charcoal, 600 MHz - 6 GHz, SMA,	180 mm (Part #: 170801-000)  Cat 18 (1200 Mbps)  — No antennas  Cat 18 (1200 Mbps)  Upgrade for R1900 with RX30-MC, IBR1700, or COR Extensibility Dock  Upgrade for E300/E3000  Enterprise Branch Routers  Charcoal, 600 MHz - 6 GHz, SMA,

<ul> <li>Includes 4 Cellular Antennas,</li> <li>Charcoal, 600 MHz - 6 GHz, SMA,</li> <li>180 mm (Part #: TAA-170801-000)</li> </ul>	Upgrade for AER2200 Branch Routers	TAA-BA-MC400- 5GB
5G  No antennas	Upgrade for R1900 with RX30- MC or IBR1700 Mobile Routers	TAA-MB-MC400- 5GB
<ul> <li>Includes 4 Cellular Antennas,</li> <li>Charcoal, 600 MHz - 6 GHz, SMA,</li> <li>180 mm (Part #: TAA-170801-000)</li> </ul>	Upgrade for E300/E3000 Enterprise Branch Routers	TAA-BF-MC400- 5GB