



Directional MiMo Wall Mount

Directional Wall/Post Mount Antenna

The Directional MiMo Wall Mount antenna is a high directional gain 2x2 MiMo signal boosting antenna for 2G/3G/4G LTE networks using Cradlepoint AER2200, AER1600 and CBA850 Series routers. Incorporating two separately fed wideband elements in a single housing the antenna is equipped to provide client side MiMo and diversity support for 2G/3G/4G LTE networks. With 6dBi of peak gain at 698-960MHz and 9dBi peak gain at 1710-2700MHz the antenna provides extra gain for next generation networks.

The rugged, weather resistant housing is designed for wall mounting with wall and mast mount brackets are provided. Supplied with fitted low loss double shielded twin cables the antenna minimises exposed connector joints and simplifies cable management for easy installation.

The Failover MiMo LTE antenna is a cost effective value added product for network operators and service providers ensuring a stable link with improved data rates.







Failover



Retail



Gas / Convenience Store



School / Higher Ed



Product Brief / Cradlepoint CP-2012-1-PAN



ments 1 & 2 698-960 / 17 2G / 3G / 4G LTE Directional	710-2700MHz		
Directional			
	Directional		
Vertical			
0-2170 MHz 9	dBi dBi dBi		
> 6	65%		
< (0.05		
5	ΩΩ		
20 V	Watts		
	98-960 MHz 66 10-2170 MHz 99 6-2700 MHz 66 > 1		

Mechanical Data		
Dimensions	Height Width Depth	9" (230mm) 7.1" (180mm) 3.7" (94mm)
Operating Temperatur	е	-40° / 176°F (-30° / +80°C)
Material		U.V. stable, impact resistant ASA
Color		RAL9010 (Pure White)
Ingress Protection		IP66
Weight		1130g


Cable Data	
	CELL
Туре	Double Shielded RG58
Length	16ft (5m)
Termination	SMA Plug

Mounting Data	
Mounting Type	Wall mount / mast mount / desk mount
Pole Diameter	0.78 - 1.96" (20-50mm)
Mounting Bracket Material	Stainless steel / Aluminium





TECHNICAL DRAWING

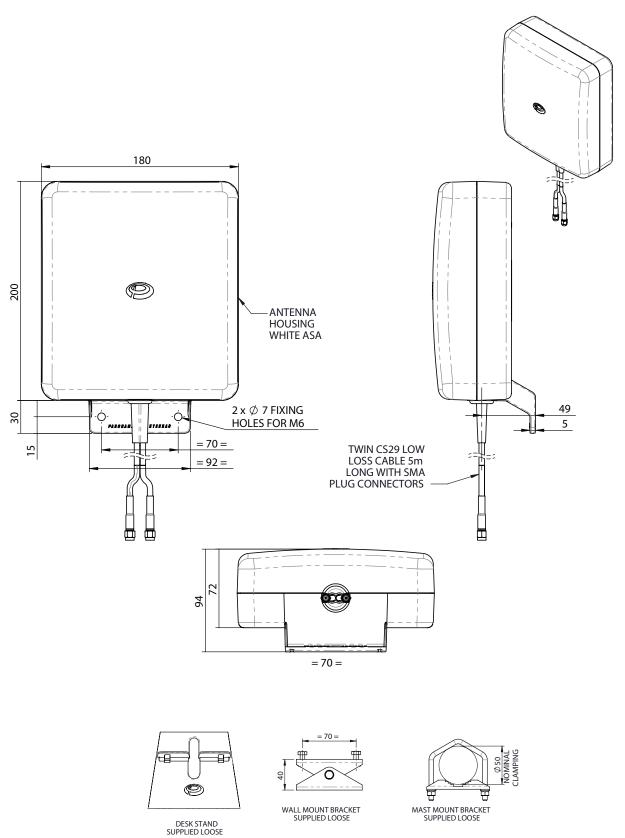







ELECTRICAL DATA



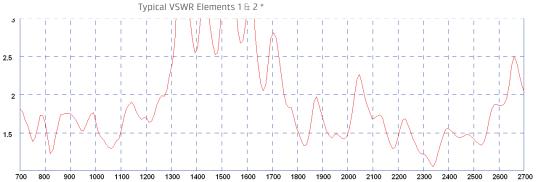


*VSWR measured with 0.5m (20") of CS29 cable.

ISOLATION

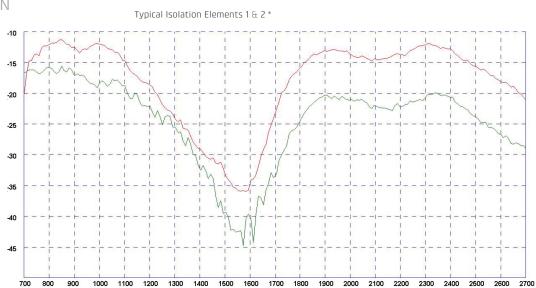

*Green Trace = typical isolation with 5m (17') of CS29 cable Red Trace = typical isloation without cable simulated in CST Microwave Studio

EFFICIENCY

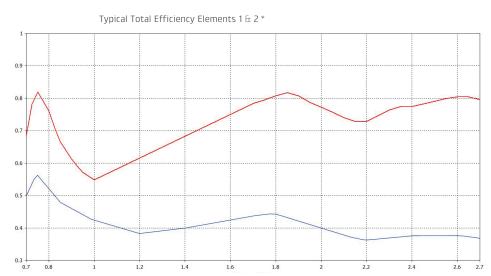


*Blue Trace = typical total efficiency with 5m (17') of CS29 cable Red Trace = typical total efficiency without cable simulated in CST Microwave Studio





RADIATION PATTERNS

3D RADIATION PATTERNS - 2G/3G/4G LTE ELEMENTS 1 & 2*

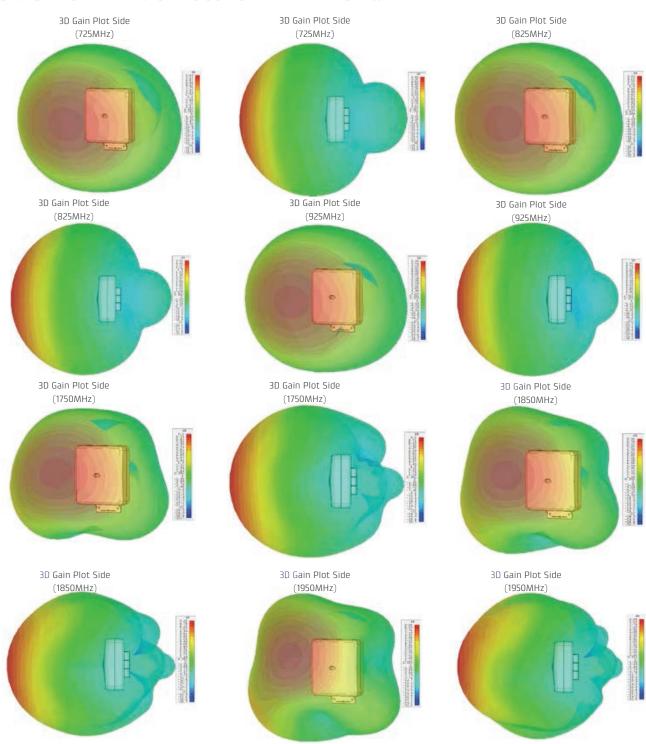


^{*}All pattern and gain measurements simulated in CST studio without additional cable.





RADIATION PATTERNS

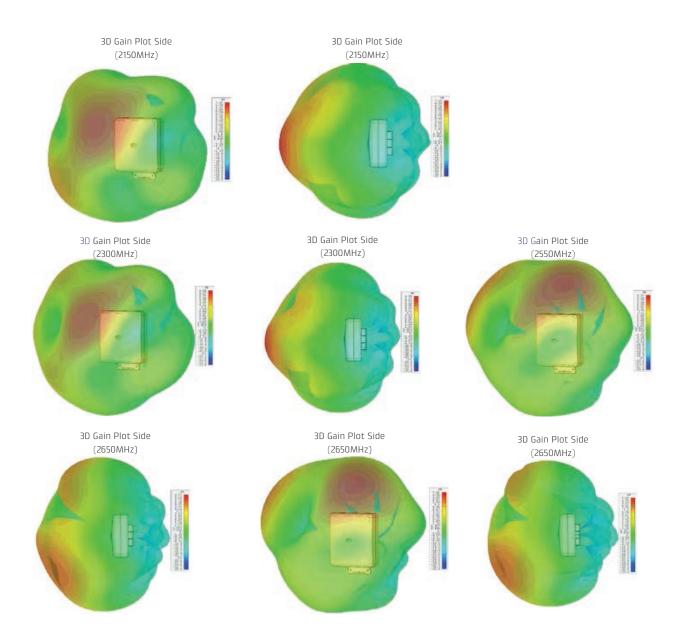

FOR MORE INFORMATION, VISIT CRADLEPOINT.COM

^{*}All pattern and gain measurements simulated in CST studio without additional cable.